

tesa® Ultra Power Under Water Repair Tape - 56491

tesa® Ultra Power Underwater Repair Tape – 56491 is a special-purpose tape that is particularly suited for applications on wet surfaces or under water. Due to its thickness and the excellent rubberized adhesive it seals damages and leaks and convinces with a strong hold. The tape conforms to any shape or object and is thus easy to use. It is ideal for outdoor use, since it is temperature resistant, UV resistant and endures extreme weather conditions.

Main Application

- Ideal for patching holes, cracks, gaps and tears
- Ideal for fixing leaking pools or gutters and seal drainage

Technical Data & Properties

Dimensions	1.5m x 50mm
Total thickness	660 µm
Adhesive	Butyl rubber
Adhesion to steel	17 N/cm
Elongation at break	>700%
Tensile strength	33 N/cm
Temperature resistance	Min. -55 °C; Max. +93 °C

- Abrasion resistance ●●●
- Water resistance ●●●●

Evaluation across relevant tesa® assortment: very good ●●●● good ●●● medium ●● low ●

For the latest information on this product please visit <http://www.tesa.com/consumer>

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, expressed or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.


PRODUCT INFORMATION



Additional Information & Pictures

Features

- Waterproof
- Extremely weather-resistant
- UV resistant
- Barrier against moisture
- Applicable on both wet and dry surfaces
- Highly temperature resistant
- Conformable to any shape or object
- Hand-tearable

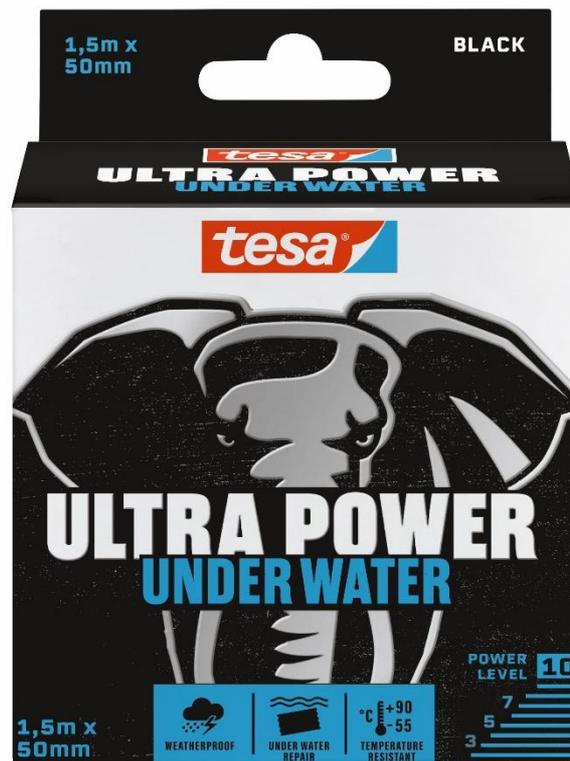

For the latest information on this product please visit <http://www.tesa.com/consumer>

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. They shall be considered as average values and are not appropriate for a specification. Therefore tesa SE can make no warranties, expressed or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. The user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to support you.